



Power Brick
Lithium-Ion battery

Blade



12V battery pack - Lithium Iron-Phosphate (LiFePO₄) - 135Ah

- **High lifespan: 3000 cycles** and more (see chart)
- **Remote monitoring by Bluetooth** (SOC, cell voltage, SOH, etc.)
- **Slim case format for tight spaces**
- **Deep discharge** allowed up to 100 %
- Ultra safe **Lithium Iron Phosphate** chemistry (no thermal run-away, no fire or explosion risks)
- **Embedded BMS** (Battery Management System) : **improve lifespan AND secure the battery**
- No **Lead**, no **rare earths**, no **acid**, no **degassing**
- Calendar life > **10 years**
- Excellent **temperature** robustness (-20 °C up to +60 °C)
- **Flexible** deployment : up to 16 packs in parallel and 4 in series
- **Constant power** during discharge (very low internal resistance)
- **Very low Peukert's losses** (energy efficiency >98 %)
- **Very low self discharge** (<3 % per month)
- **No memory effect**
- About **50 % lighter** and **40% smaller** than equivalent Lead-AGM battery with same usable energy
- **Certification : CE, RoHS, UN 38.3**

Technical Specifications

Electric	Nominal voltage	12.8 V
	Nominal capacity	135Ah
	Stored energy	1728 Wh
	Internal resistance	1mΩ
	Cycles	>3000 cycles (see chart)
	Self discharge	< 3% per month
	Energy efficiency	98%
	Standard Charge	Charge voltage
Charge mode		CC/CV : Constant Current / Constant Voltage
Continuous charge current / Maximum charge current		70 A / 100A
BMS charge cut-off voltage		14.8V ± 0.1V
Standard Discharge	Instant peak discharge current	800A (300 ms)
	Continuous discharge current	135A
	Maximum discharge current (< 30s)	200A
	BMS discharge cut-off voltage	10V
Environment	Charge temperature range	0°C to +55°C
	Discharge temperature range	-20°C to 60°C
	Storage temperature	-5°C to 45°C
	IP protection level	IP65
Mechanical	Type of cells	Cylindrical LiFePO ₄ cell
	Casing material	ABS
	Dimensions	395X108X287 mm
	Weight	13.1kg
	Terminal	M8



APPLICATIONS

- **Electrical vehicles and utilities**
- **Robotics and AGVs**
- **Solar and wind energy storage**
- **Marine**
- **Street lightning**
- **CCTV and security camera**
- **UPS, electric back-up**
- **Telecom**
- **Medical equipments**
- ...



PowerBrick


Lithium-Ion battery

Blade




Charts and curves


Different Rate Discharge Curve @25°C

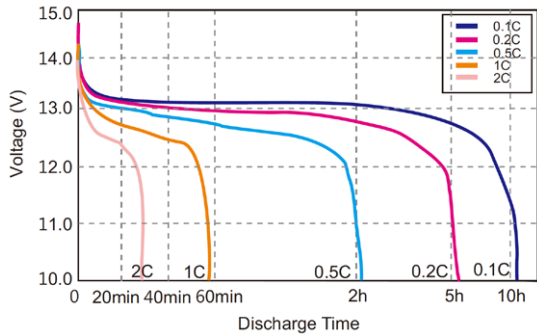


Discharge Curves (0.5C) at different Temperatures

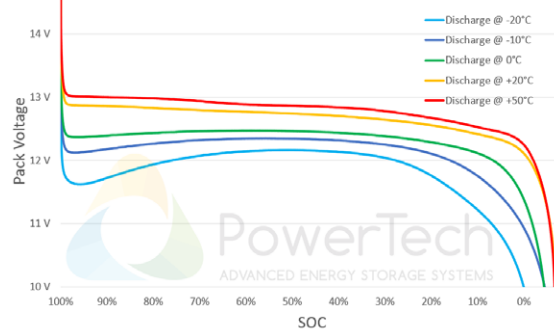


State of Charge Curve @0.5C 25°C

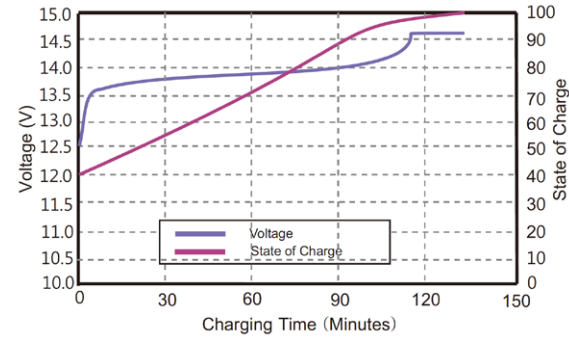


Charging Characteristics @0.5C 25°C

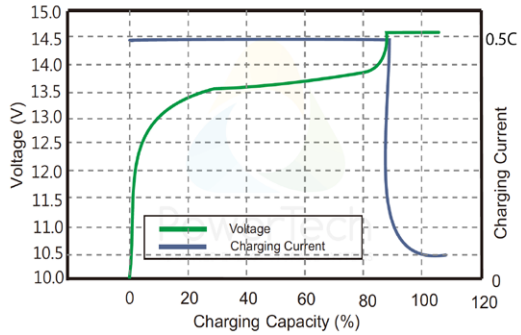




Number of cycles vs. Depth of discharge (DoD)

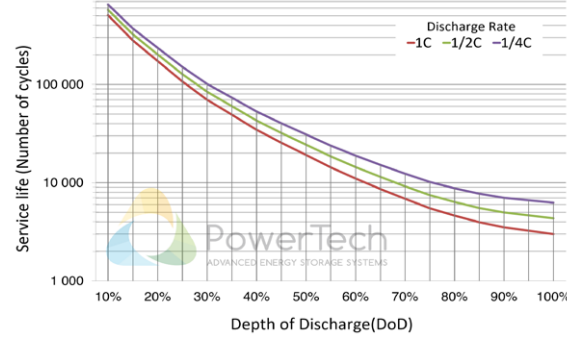

Different Temperature Self Discharge Curve

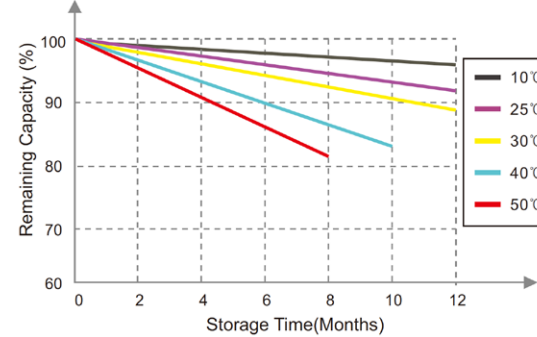

Dimensions

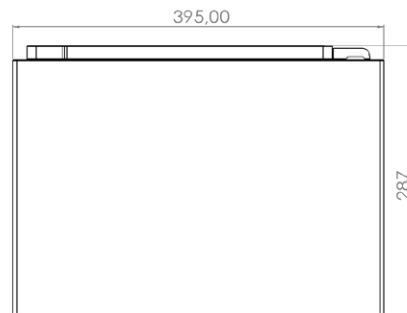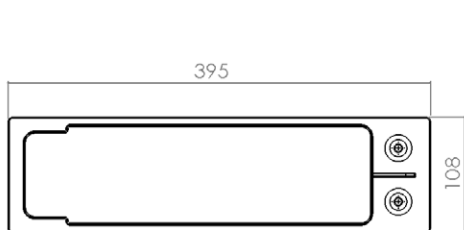

PowerTech
systems

VI.5

PowerTech Systems SAS
ZA Charles Renard - Batiment A1
6 Bld Georges Guynemer
78210 ST CYR L'ÉCOLE - France

SAS au capital de 1 000 000 Euros
SIREN : 793926577 - TVA : FR33793926577

www.powertechsystems.eu
+33 185 400 970
contact@powertechsystems.eu